

P-710-H Andes Proximity Reader

Optimized for Applications Requiring Longer Read Range



P-710

High Performance Convenience - Provides read ranges up to 15-inches (381 mm).

Straightforward Installation - Install directly to metal or plastic single-gang wall box.

Wiegand Outputs - Compatible with all standard access control systems.

Overview

The P-710-H Proximity Reader is a member of the *Pyramid Series Proximity®* line of OEM proximity readers, cards and tags. A high performance design, it is classified as a medium range reader, and is capable of delivering read ranges of up to 15 inches (381 mm). The longer read range of the P-710 adds convenience to a wide range of access applications, including turnstiles and parking control.

Technology

- Supports Farpointe's 125-kHz *Pyramid Series Proximity* cards and tags, as well as HID's standard 125-kHz proximity cards and tags.
- Optional compatibility with AWID's standard 125-kHz proximity cards and tags.
- Making use of Pro-X™ RFID technology, offers best in class read range.
- Wiegand (industry standard 26-bit and custom) and magnetic stripe outputs are standard.


Easy Installation

- Single-piece design mounts directly to metal or plastic US wall switch boxes, or flat surfaces.
- Quick installation, with only two mounting screws necessary.
- For alignment horizontal and vertical mounting slots are standard.
- Electronics are sealed in weather-and tamper-resistant epoxy potting for both indoor and outdoor operation (industry high IP67 rating).

Additional Features

- Recessed label area provides for the option of private labeling.
- Mounting screws are hidden, increasing vandal resistance.
- MAXSecure™ compatible, providing an additional level of system security.
- Oversized LED array, ideal for increased visibility in outdoor installations.

Data Sheet

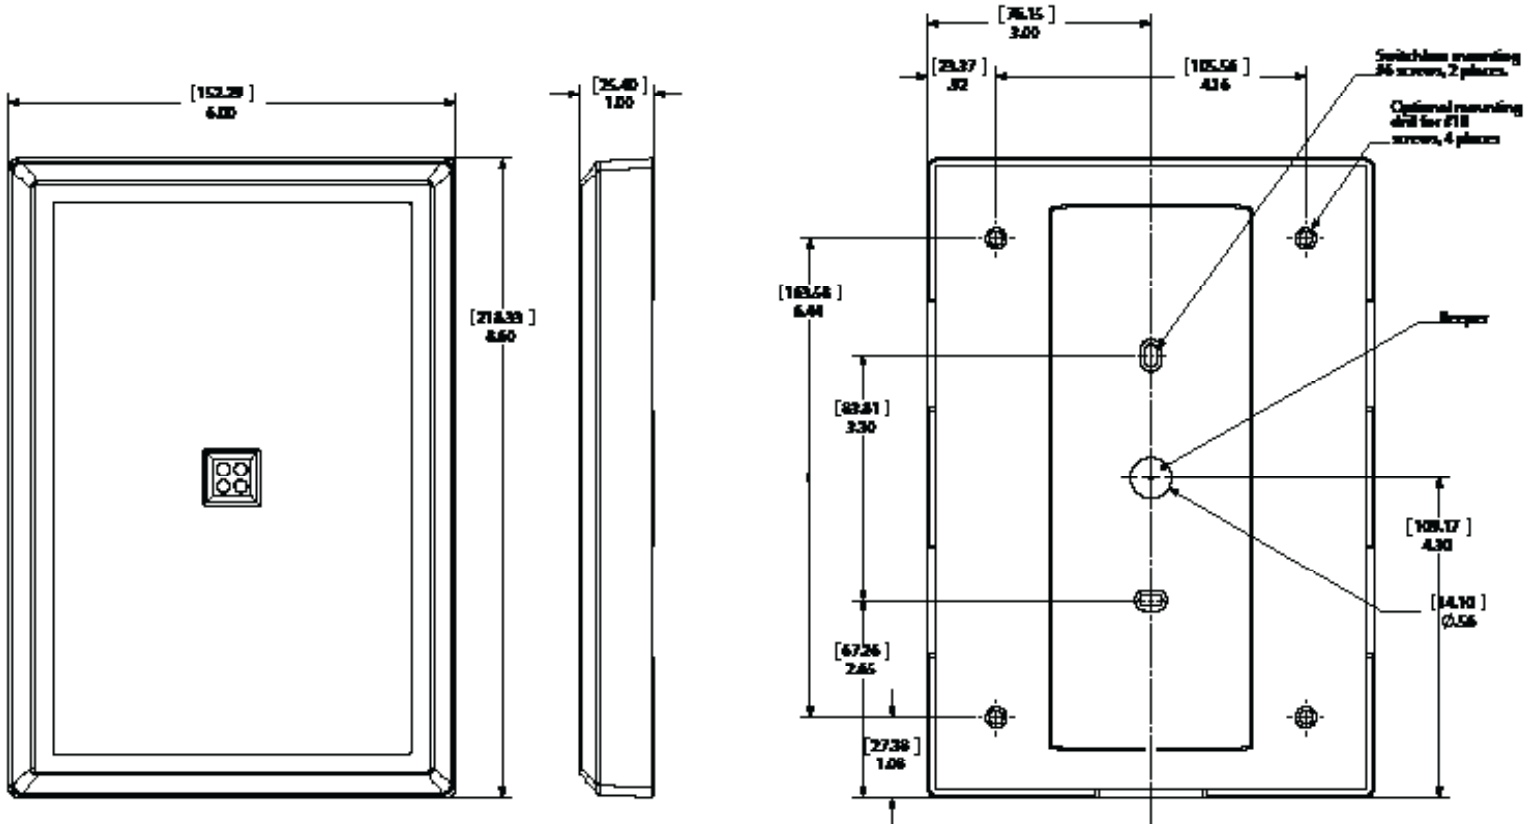

Farpointe Data reserves the right to change specifications at any time and without notice.
 © 2009 Farpointe Data, Inc. All rights reserved.
 Protected by U. S. and worldwide patents.
 Farpointe Data, Inc. and the Farpointe Data logo are registered trademarks of Farpointe Data, Inc.
 HID is a registered trademarks of HID Global. MIFARE is a registered trademark of NXP B.V.
 All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

Specifications

- | | |
|---|---|
| <p>Dimensions: 8.6 x 6 x 1 inches (22 x 15 x 2.5 mm)</p> <p>Input Voltage: +5 to 14 VDC</p> <p>Current: Average: 200mA
Peak: up to 600mA</p> <p>Transmit Frequency: 125-kHz</p> <p>Weight: 1.4 lbs. (635 g)</p> <p>Read Range¹: Up to 15 inches (381 mm)</p> <p>Suggested Linear Power Supplies: Altronix: model LPS3C12X
Electronic Security Devices (ESD): model LP1EST12
Highpower Security Products: Lightning 505</p> <p>Warranty: The P-710 carries a limited lifetime warranty against defects in materials and workmanship</p> | <p>Operating Temperature: -40° F to 149° F (-40° C to +65° C)</p> <p>Cable Distance: Up to 500 ft. (152 m)</p> <p>Audio Tone: US size single gang wall box or on non-metallic flat surfaces.</p> <p>Mounting: US size single gang wall box or non-metallic flat surfaces.</p> <p>Certifications: FCC, CE, C-Tick, ICC</p> <p>LED: Four-state standard (red, green, amber, off)</p> <p>Credential Compatibility²: Standard: Pyramid Series Proximity & standard HID 125-kHz proximity.
Optional: Standard AWID 125-kHz proximity</p> |
|---|---|

¹Using model PSC-1 Standard Light Proximity Card
²With a control card, HID and AWID proximity compatibility may be enabled/disabled.